

1U4LW-C242 RPSU

1U4LW-C242



1U4LW-X470



2666



Micro ATX

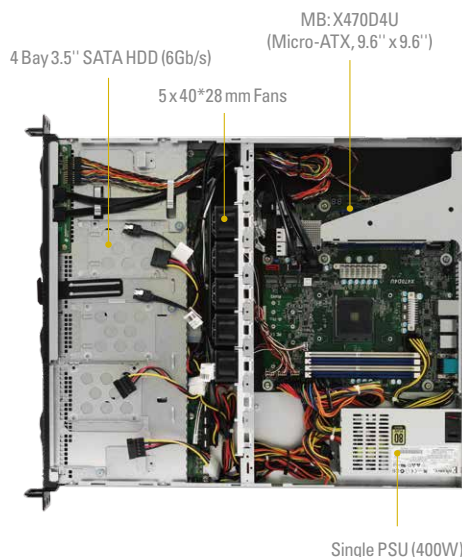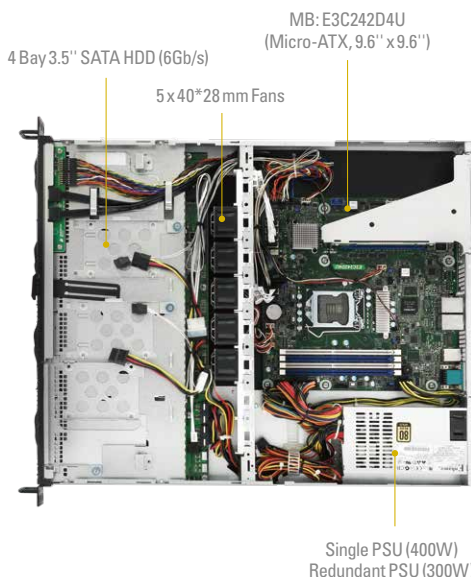

Application


- Appliance Server
- SMB and Web Hosting




4 x 3.5" SATA HDD



4 x 3.5" SATA HDD

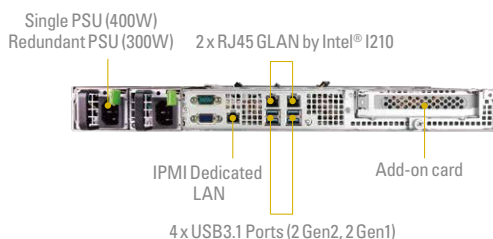

IPMI Dedicated LAN Add-on card 4 x USB3.1 Ports (2 Gen2, 2 Gen1)

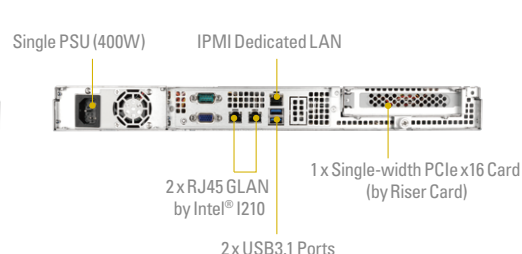

Single PSU (400W) IPMI Dedicated LAN 2 x RJ45 GLAN by Intel® I210 1 x Single-width PCIe x16 Card (by Riser Card) 2 x USB3.1 Ports

1U4LW-C242 RPSU



1U4LW-C242



1U4LW-X470 ^{AMD} RYZEN

System Physical Status	Form Factor	1U Rackmount	1U Rackmount	1U Rackmount
Chassis Dimension		533.4 x 482.6 x 44.4 mm (21" x 19" x 1.75")	533.4 x 482.6 x 44.4 mm (21" x 19" x 1.75")	533.4 x 482.6 x 44.4 mm (21" x 19" x 1.75")
Support MB Size		Micro-ATX, 9.6" x 9.6" (E3C242D4U)	Micro-ATX, 9.6" x 9.6" (E3C242D4U)	Micro-ATX, 9.6" x 9.6" (X470D4U)
CPU		Supports Intel® Xeon® E-2100/E-2200 Series Processors	Supports Intel® Xeon® E-2100/E-2200 Series Processors	AMD Ryzen™ PRO/ 3000 and 2000 Series Desktop Processors
System Memory		4 DIMM Slots, DDR4 2666/2400 ECC/ non-ECC U DIMM	4 DIMM Slots, DDR4 2666/2400 ECC/ non-ECC U DIMM	4 DIMM Slots, Support Dual Channel DDR4 2666/2400/2133 non-ECC/ECC U DIMM
Front Panel	Buttons	Power Switch, ID Switch, System Reset, NMI button	Power Switch, ID Switch, System Reset, NMI button	Power Switch, ID Switch, System Reset, NMI Buttons
LEDs		Power Status, HDD, LANs, System Fail LEDs	Power Status, HDD, LANs, System Fail LEDs	Power Status, HDD, LANs, System Fail LEDs
I/O Ports		2x USB3.0	2x USB3.0	2x USB 3.0
MB Tray	I/O Ports	4x USB3.1(2(Gen2), 2(Gen1)), 1 x D-Sub, 1 x serial port	4x USB3.1(2(Gen2), 2(Gen1)), 1 x D-Sub, 1 x serial port	1 x D-Sub, 2x USB3.1 Gen 1 Ports, 1 x serial port
LAN Port		RJ45: 2(1G)+1(IPMI)	RJ45: 2(1G)+1(IPMI)	RJ45: 2(1G)+1(IPMI)
External Drive Bay	Front Side Drive Bay	External: 4 x Hot-swap 3.5" HDDs or 4 x 2.5" HDDs, 1 x Slim ODD or 1 x 2.5" HDD(Optional) Internal: 2.5" HDD x 2	External: 4 x Hot-swap 3.5" HDDs or 4 x 2.5" HDDs, 1 x Slim ODD or 1 x 2.5" HDD(Optional) Internal: 2.5" HDD x 2	External: 4 x Hot-swap 3.5" HDDs or 4 x 2.5" HDDs, 1 x Slim ODD or 1 x 2.5" HDD(Optional) Internal: 2 x 2.5" HDDs
Power Supply	Capacity	RPSU PSU (1+1)	Single PSU	Single PSU
Output Watts		300W	400W	400W
Efficiency		GOLD	GOLD	GOLD
System Cooling	Fan	5 x 40*28 mm PWM Easy-Swap Fans	5 x 40*28 mm PWM Easy-Swap Fans	5 x 40*28 mm PWM Easy-Swap Fans