

# 1U2LW-C242



## 1U2LW-X470



DDR4





Micro ATX

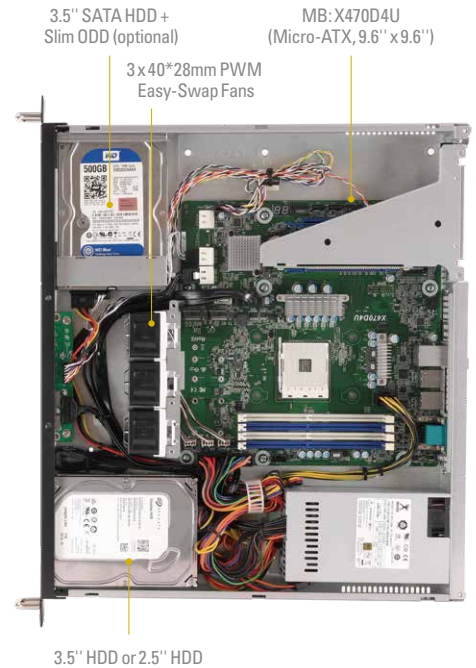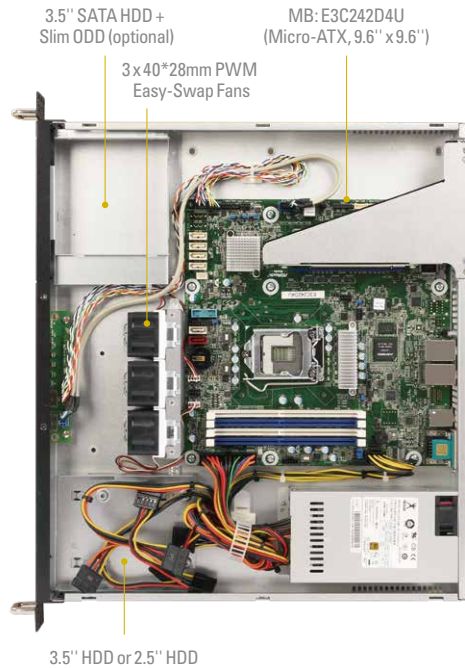

### Application

- Appliance Server
- SMB and Web Hosting

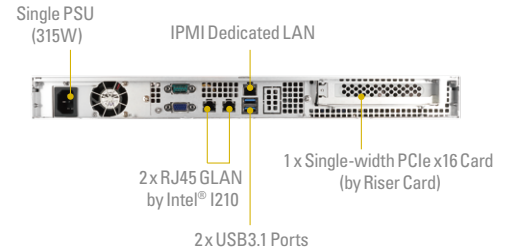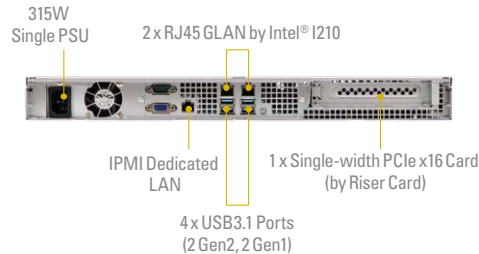

### 1U2LW-C242



### 1U2LW-X470



System Physical Status	Form Factor	1U Rackmount	1U Rackmount
	Chassis Dimension	394 x 482.6 x 44.4 mm (15.5" x 19" x 1.75")	394 x 482.6 x 44.4 mm (15.5" x 19" x 1.75")
	Support MB Size	E3C242D4U(Micro-ATX, 9.6" x 9.6")	X470D4U(Micro-ATX, 9.6" x 9.6")
Front Panel	Buttons	Power On/Standby Button, ID button, System Reset Button, NMI Button	Power On/Standby Button, ID button, System Reset Button, NMI Button
	LEDs	UID, LAN LED	UID, LAN LED
	I/O Ports	4 x USB 3.1 Ports: 2 (Gen2), 2(Gen1)	2 x USB 3.1 Ports
Storage	External	Slim ODD x1(Optional)	Slim ODD x1(Optional)
	Internal	2 x 3.5" SATA HDDs or 1 x 3.5" SATA HDD & 1 x 2.5" SATA HDD	2 x 3.5" SATA HDDs or 1 x 3.5" SATA HDD & 1 x 2.5" SATA HDD
System cooling	Fan	3 x 40*28 mm PWM Easy-Swap Fans	3 x 40*28 mm PWM Easy-Swap Fans
Power Supply	Capacity	Single PSU	Single PSU
	Output Watts	315W	315W
	Efficiency	GOLD	GOLD